


AMERICAN CHANGER MAINTENANCE KIT


Step 1.

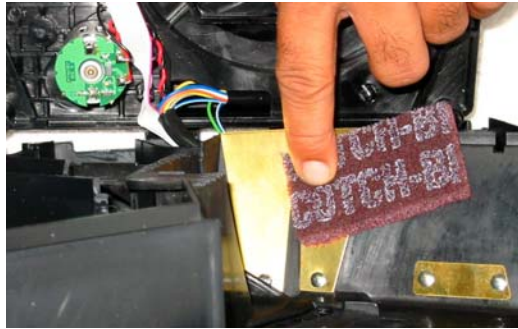

Do not separate the hopper to perform this step!

Using the dry Scotch-Bright pad clean Plates until they shine.

Step 2.

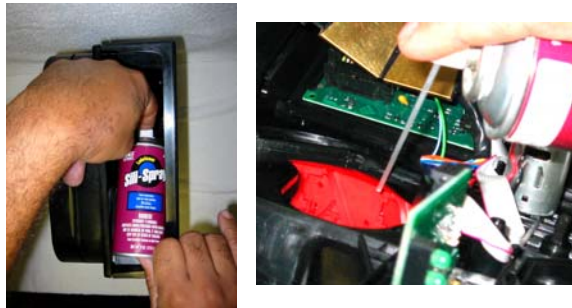

Do not separate the hopper to perform this step!

Place the changer in the dump mode:

1. Turn off power, **remove the hopper extension.**
2. Hold in "Dump Button".
3. Turn on power.
4. Count 1-2-3
5. Release "Dump Button"

Hopper should now be running. If not Repeat. **Spray lubricant on the RED belt ONLY!** Spray for 4-5 seconds.


DO NOT SPRAY SILICON ON THE TWO HOPPER LOGIC BOARDS!

Cleaning the Validator(s). Step 3.




Insert the soap & water-cleaning card as shown. (Card can be used until dry.)

Step 4.

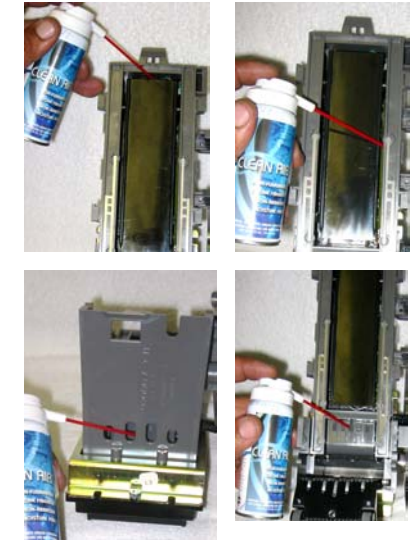

Cycle the power on and off quickly until the stacker for the bill acceptor coasts into the out position. Using the can of air, blow out all of the following places.

Step 5.

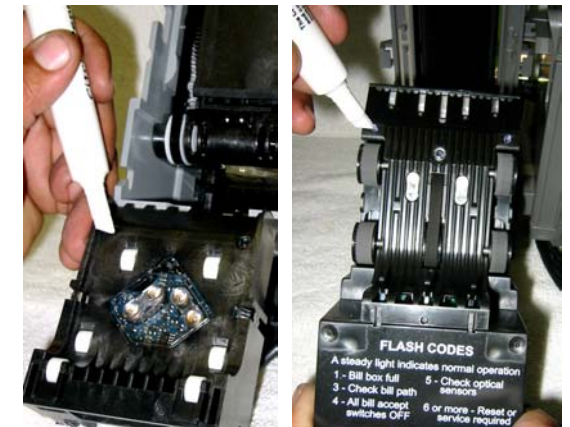

Remove the lower unit as shown. Use the Citrus-Pen to clean the optics on the lower housing of the validator.

This completes all maintenance procedures.



This kit includes the following items:

- #1 - 5 Validator Cleaning Cards
- #2 - 4 Scotch-Brite LOW-COIN Cleaning Pads
- #3 - Validator Optic Cleaning Pen
- #4 - 2.75oz Can Compressed Air
- #5 - 4oz Can of hopper Lubricant

Using the Maintenance Kit:

The following maintenance should be performed monthly to extend the life of your components:

Cleaning & lubing the hopper.

NOTICE: THE HOPPER IN THE FOLLOWING STEPS IS SHOWN SEPARATED FOR EXPLANATION REASONS ONLY!!! It is not necessary to separate the hopper to perform these steps!